


EXAMPLE 5 : GE BREAKER (tests performed in Alabama, USA)

The breaker shown here is a 3-contact unit, one contact per phase.




For the displacement measurement, this breaker has a place for this purpose, where a rod can be inserted and screwed to the mobile part of the contact, as shown in the photo below:

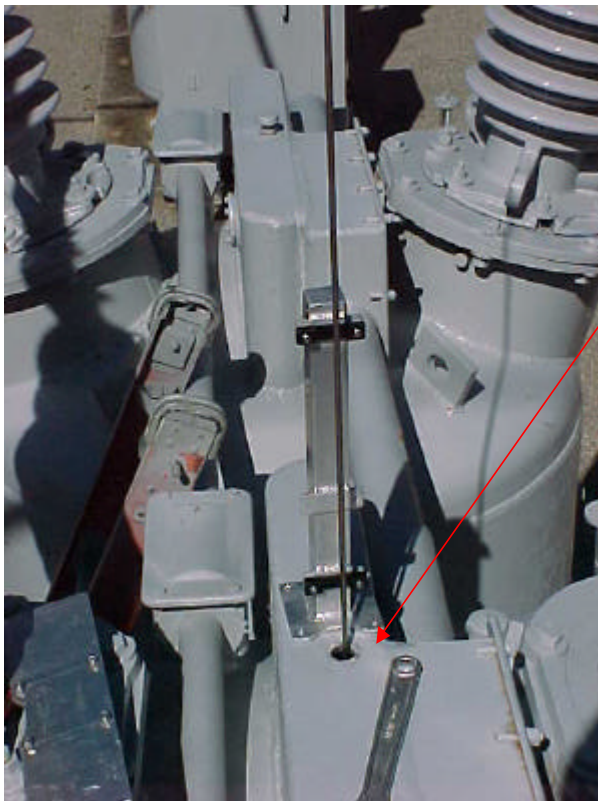




The **KIT-ZLB linear kit** used with a ZLT-600 transducer.

Test results on Close operation using **CBA WIN** software

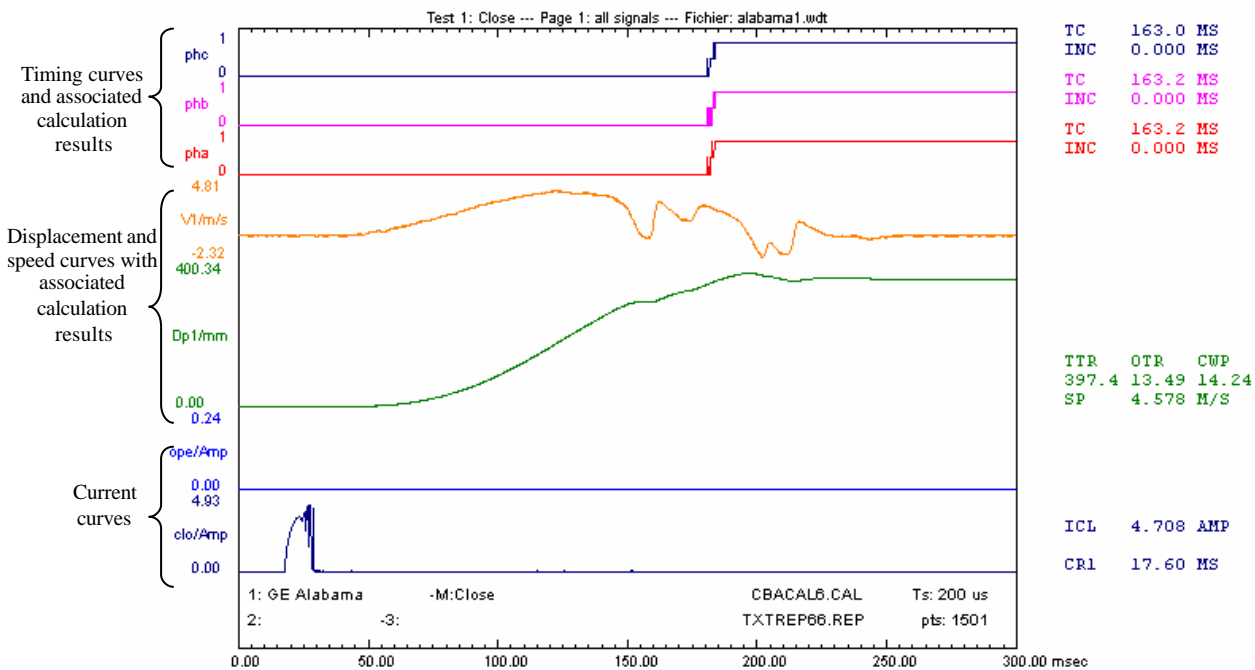


In these test results, in addition to the usual curves we can see the instantaneous velocity curve, drawn in orange on the graph.

Test results on Open operation using CBA WIN software

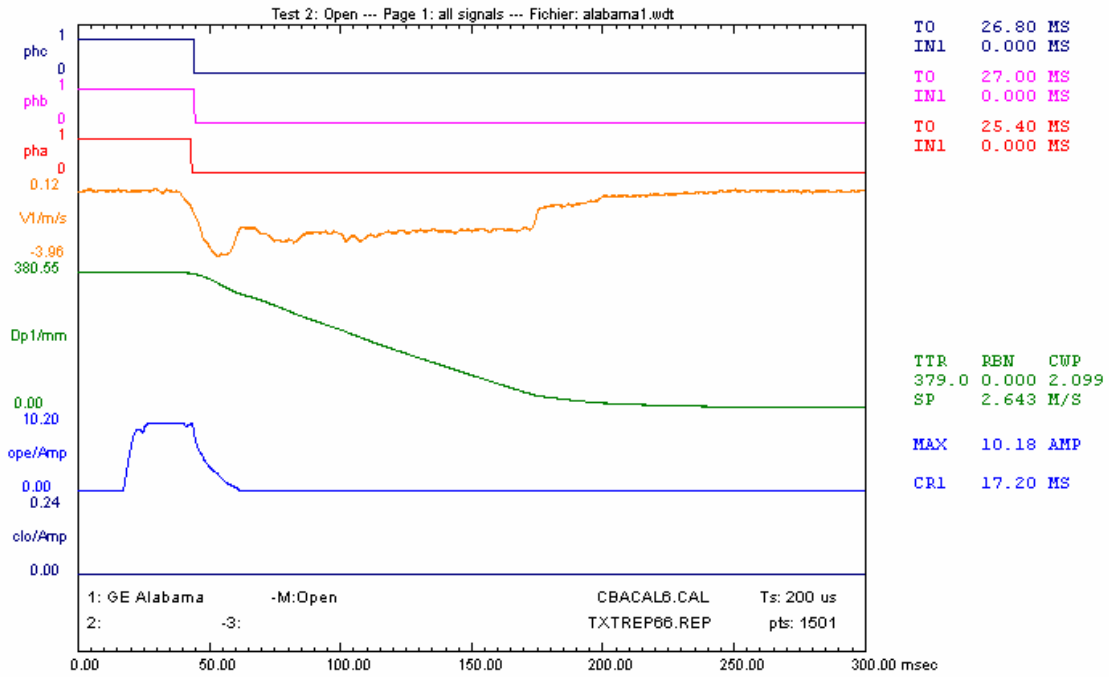

FK121-20000-2 Thu Feb 14 14:26:51 2002

Test results on Close-Open operation using CBA WIN software

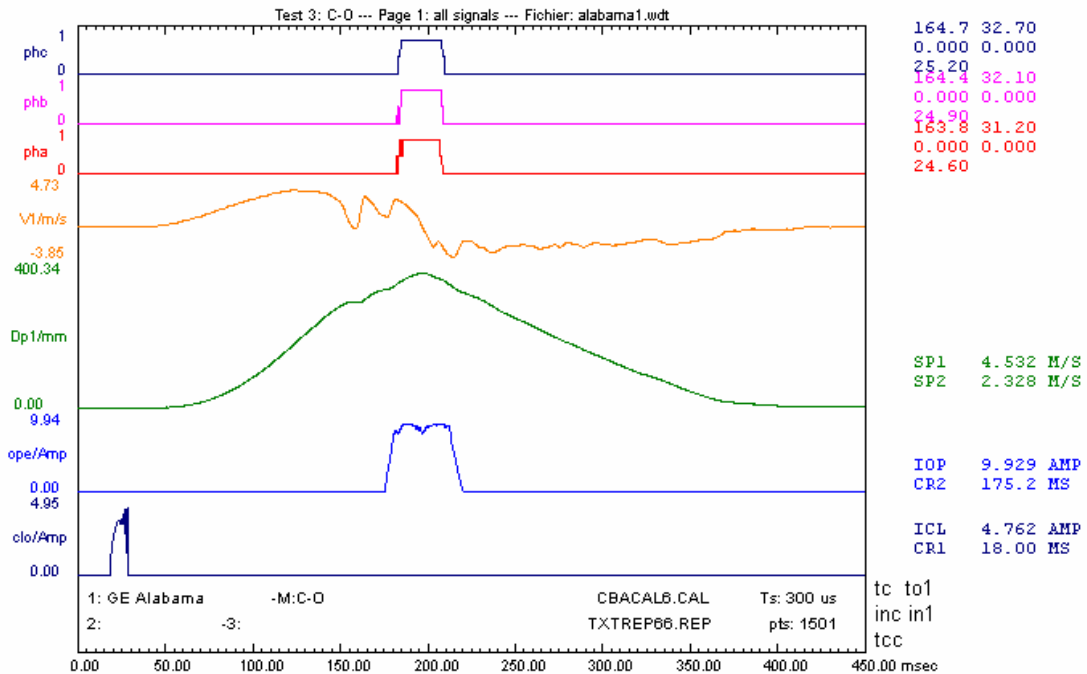

FK121-20000-2 Thu Feb 14 14:26:51 2002